


NORDIC PINE DUSK

Glazed Ceramic Tile

SURFACE	Glazed (GL) / Enameled
SIZE	20 x 120 cm / 8" x 48"
ABSORPTION GROUP	BIIa
COVERAGE / CARTON	1.68 m ² / 18.08 ft ²

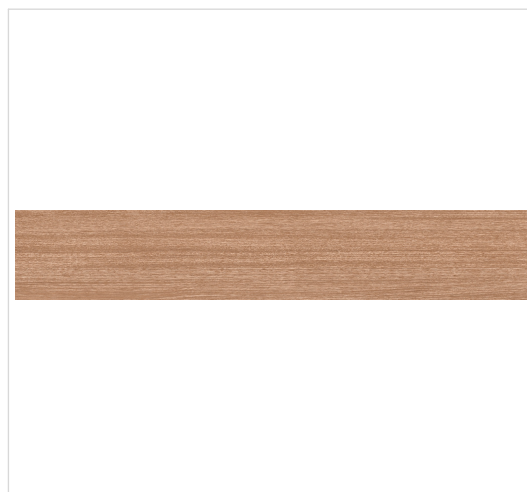

PERFORMANCE & TECHNICAL CHARACTERISTICS

PROPERTY	TECHNICAL VALUE	REFERENCE / NOTES
Water Absorption	3% to 6%	Group BIIa - semi-stoneware.
Chemical Resistance	GB / GLB	Resistance to chemical attack.
Stain Resistance	Class 3	Cleanability classification.
Flexural Strength	≥ 22 MPa	Technical specification for BIIa.
Breaking Load	> 1000 N	Mechanical resistance requirement.
Moisture Expansion	≤ 0.6 mm/m	Maximum declared expansion.
Crazing Resistance	Resistant	Does not craze under the stated requirement.
Coefficient of Friction	< 0.4	NBR 16919/20 - non-slip classification stated in source.
Scratch Resistance	MOHS 3	Surface scratch hardness.

PRODUCT DETAILS

Nominal size: 200 x 1200 mm. Pieces per carton: 7. Rectified edges. Technical specifications are shared across the Nordic Pine line; this sheet identifies the individual finish shown above.

Technical values reproduced from the manufacturer's general technical specification for the NORDIC PINE 20x120 line. Product appearance corresponds to the individual finish shown in this sheet.